


Plywood portfolio

Your Project, Our Plywood: Perfect for Exceptional Finishes

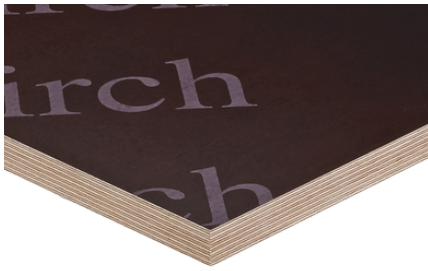


PERI Birch
High quality plywood for flat concrete finish

Birch plywood throughout, 13-ply
120 gr/m² phenolic resin film
Bonding with WBP phenolic glue
According to (EN 314-2, Class 3)
Sealed edges

Article no: 052824
Thickness: 18 mm
Weight: 12.6 kg/m²
Panel size: 2500 x 625 mm
Bundle: 80 sheets

Up to 50 uses*

Price will be provided upon request

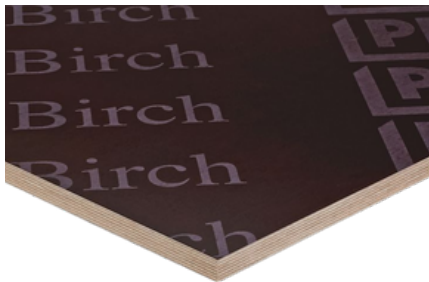


PERI Birch
High quality plywood for flat concrete finish

Birch plywood throughout, 15-ply
120 gr/m² phenolic resin film
Bonding with WBP phenolic glue
According to (EN 314-2, Class 3)
Sealed edges

Article no: 052820
Thickness: 21 mm
Weight: 14.7 kg/m²
Panel size: 2500 x 1250 mm
Bundle: 40 sheets

Up to 50 uses*

Price will be provided upon request

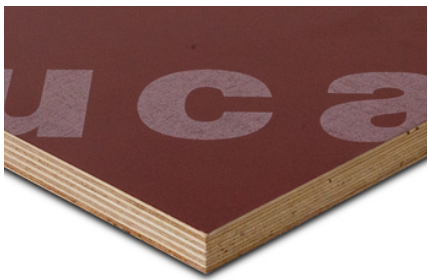

EUCAFILM
Concrete finishes with standard requirements

Eucalyptus/poplar combi core
Poplar faces
180-200 gr/m² phenolic resin
Bonding with WBP-melamine
glue 12-hours boiling test
Sealed edges

Article no: 052628
Thickness: 21 mm
Weight: 12.80 kg/m²
Panel size: 2500 x 1250 mm
Bundle: 45 sheets

Up to 10 uses*

Price will be provided upon request




PERI Beto
Wall and slab formwork panel for concrete finishes with standard requirements

Poplar throughout 11ply
180-200 gr/m² phenolic resin film
Bonding with WBP-melamine
glue 6-hours boiling test
Sealed edges

Article no: 055299
Thickness: 18 mm
Weight: 12.20 kg/m²
Panel size: 2500 x 1250 mm
Bundle: 40 sheets

Up to 20 uses*

Price will be provided upon request

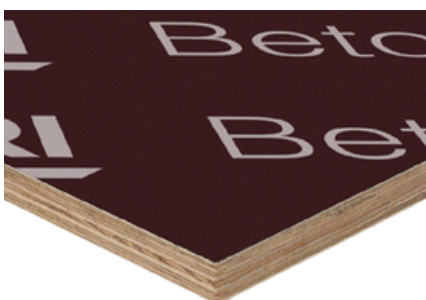

PERI Beto
Wall and slab formwork panel for concrete finishes with standard requirements

Poplar throughout 13-ply
180-200 gr/m² phenolic resin film
Bonding with WBP-melamine
glue 6-hours boiling test
Sealed edges

Article no: 055300
Thickness: 21mm
Weight: 14.30 kg/m²
Panel size: 2500 x 1250 mm
Bundle: 25 sheets

Up to 20 uses*


Price will be provided upon request

* The price is subject to changes in material availability, price fluctuation of raw materials and conditions out of PERI's control.

* The above prices do not include local transportation costs.

* The actual number of re-uses may vary depending on the application and the type of use and handling.

Components | Plywood Portfolio

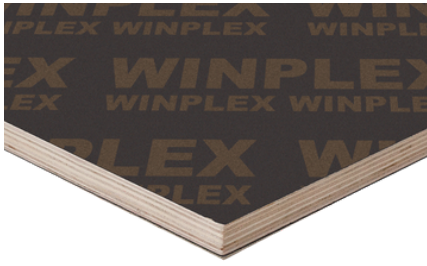

WINPLEX


For slab surfaces without any special requests

180-200 gr/m² phenolic resin film
 Bonding with WBP-melamine glue

4-hours boiling test
 Sealed edges
 Up to 5 uses*

Article no.: 050479
 Thickness: 21 mm
 Weight: 11.80 kg/m²
 Panel size: 2500 x 1250 mm
 Bundle: 43 sheets

Price will be provided upon request

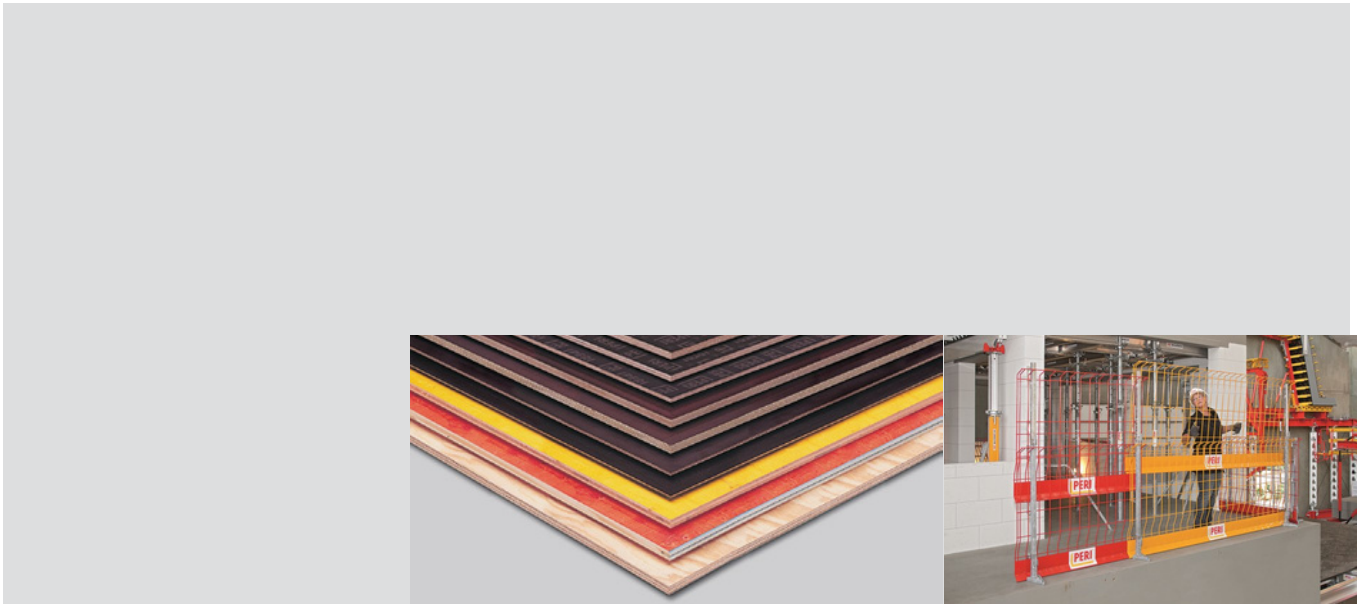

Formwork
 Scaffolding
 Engineering

www.peri.co.za

* The price is subject to changes in material availability, price fluctuation of raw materials and conditions out of PERI's control.

* The above prices do not include local transportation costs.

* The actual number of re-uses may vary depending on the application and the type of use and handling.